

XSS 5030 WI



PRODUCT SPECIFICATIONS:

50" x 30" x 38.75" Handed by Door Hinge

Walk-In bathtub with hinged door and molded seat. Includes self leveling base and door side cover panel.

CODES:

This unit complies with ANSI Z 124 and shall meet the requirements for Uniform Plumbing Code administered by NAHB.

AVAILABLE FEATURES:

Aerobath: Bathtub with 24 air jets

Whirlpool: Bathtub with 6 whirlpool jets

Aerowhirl: Combination of air jets and whirlpool jets

Soaker Tub: Bathtub only

PRODUCT INFORMATION:

Unit Color: Gelcoat: White, Bone or Biscuit
Surface CenturyStone™ Granite finishes

Jet Trim Color: Satin Nickel, Chrome, Bone,
Polished Brass, Biscuit or White

Warranty: Gelcoat Models have a (3) three year limited warranty.
Century Stone models have a (10) ten year limited warranty.
Pumps, parts, and accessories (1) one year limited warranty.

OPTIONAL ACCESSORIES:

1500 Watt Inline Heater

Carpeted Entry Ramp

Wave Bar (field installation):


Oil Rubbed Bronze, Satin Nickel,
Polished Brass or Chrome
- 24" x 1.5" Wave Bar

End Cover Panel: Gelcoat or CenturyStone finish

Waste & Overflow (Drain)*: Oil Rubbed Bronze,
Satin Nickel, Polished Brass or
Chrome *All models include a cable driven waste & overflow.


ALL ACCESSORIES OPTIONAL

XSS 5030 WI

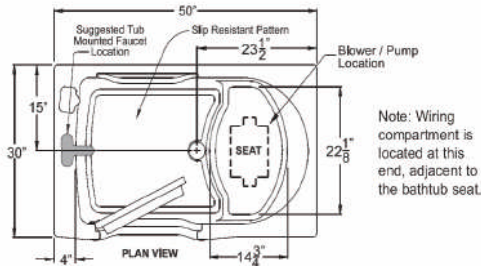

50" x 30" x 38.75"

Handed by Door Hinge

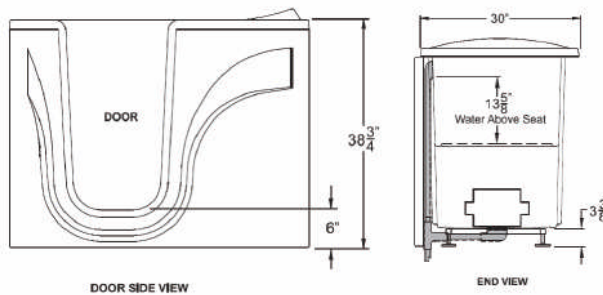

DETAILED PRODUCT INFORMATION:

Capacity: 95 US Gallons- To Overflow
70 US Gallons- To Operating Level

Est. Drain Time: 2 Minutes

Weight: Gelcoat Surface:
Empty- 182 lbs.
Full- 972 lbs.

CenturyStone Solid Surface:
Empty- 207 lbs.
Full- 997 lbs.

Electrical Requirements:

Pump: 120V, 60 Hz, 15Amps
Dedicated GFCI

Blower: 120V, 60 Hz, 15Amps
Dedicated GFCI

Heater: 120V, 60 Hz, 15Amps
Dedicated GFCI

Inside Dimensions:

Foot Well: 26 1/2" x 20"
At Top: 36" x 26"

Seat Height: Top to Bottom 16"
Seat Dimensions: 23 1/2" W x 14 3/4" D

Door Opening Dimensions:
17 1/2" wide at top
14 3/8" wide at bottom
32 3/4" tall

Weight Limit Capacity: 350 lbs.

Due to the nature of the materials, dimensions may vary +/- 1/2"